


Command Unit

Capabilities: 1000 code capability

Serial output to PC

Power: 120 or 240 Vac

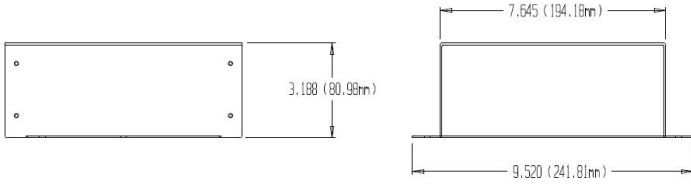


Optional Charger

Power: 120 or 240 Vac

Charge Time: 90 minutes

Charges 1 to 4 sensors simultaneously

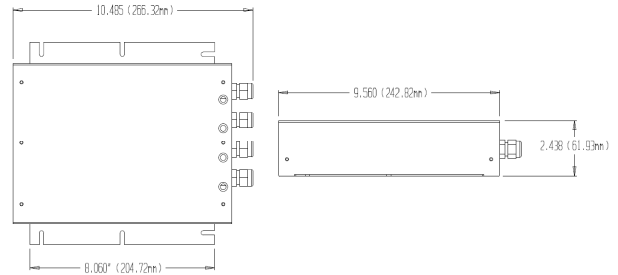


Omnidirectional Hydrophone


Beam Pattern: Omni

Output: 100 W

Range: 700 meters

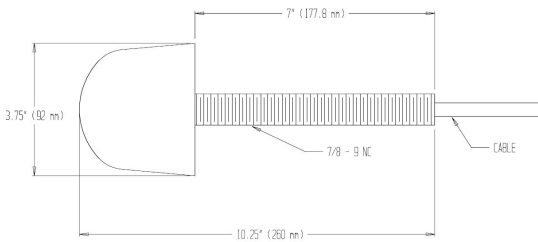

Transponder

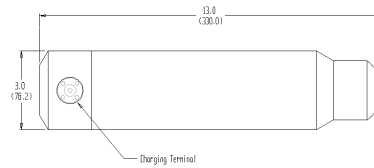

Distance Accuracy: +/- 0.5m

Listening Time: 90 days

Range: Up to 2000 meters

Weight: 1.1 kg in water

Deployable Depth: 1400 m

Battery: Choice of rechargeable or non-rechargeable