



Command Unit

Capabilities: 1000 code capability
 Serial output to PC
 Power: 120 or 240 Vac

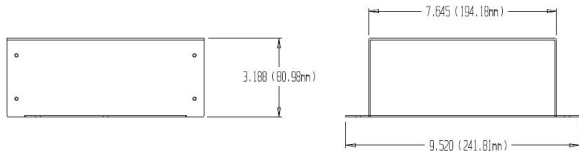


Charger

Power: 120 or 240 Vac
 Charge Time: 90 minutes
 Charges 1 to 4 sensors simultaneously

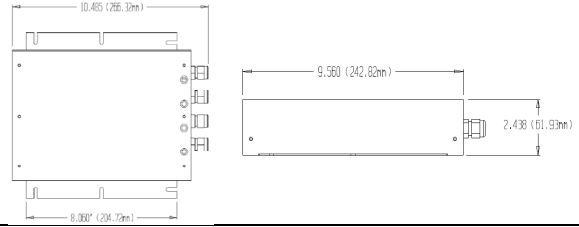

Omnidirectional Hydrophone


Beam Pattern: Omni
 Output: 100 W
 Range: 700 meters

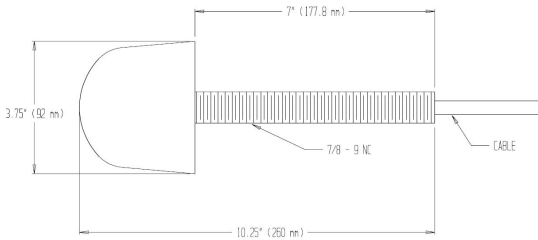

Sensors


(General specifications for all sensors unless noted)
 Range: Up to 2000 meters
 Weight: 1.1 kg in water
 Battery Capacity: Full trip capability
 Deployable Depth: 1400 m

Depth Sensor

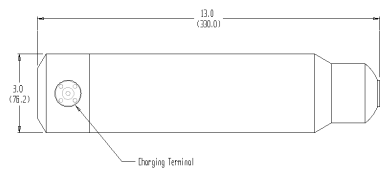


Accuracy: +/- 0.25% FS
 Depth Resolution: +/- 0.1 meters
 Operating Depth: 250/500/1000/1500 meters

Temperature Sensor

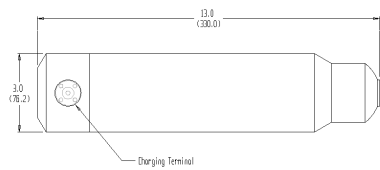

Accuracy: +/- 0.5°C
 Resolution: +/- 0.1°C

Depth Temperature Sensor

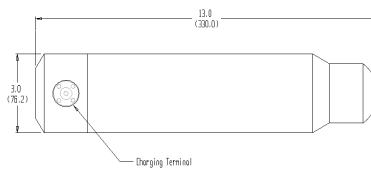

Depth Accuracy: +/- 0.25% FS
 Depth Resolution: +/- 0.1 meters
 Operating Depth: 250/500/1000/1500 meters
 Temperature Accuracy: +/- 0.5°C
 Temperature Resolution: +/- 0.1°C